



USHA PLUS clean agent extinguishers have effective & high extinguishing action and environmentally acceptable and excellent alternative for Halon 1211 Clean Agent. It is a non corrosive, electrically non conductive and free non-residual medium. It is ideally suited for protecting high value equipment.

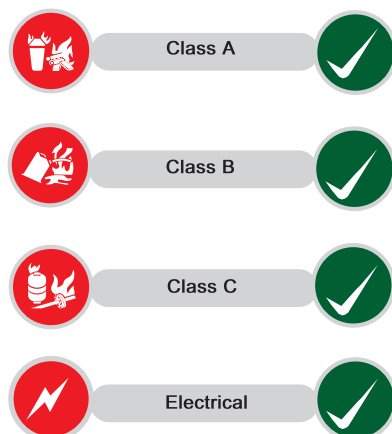



APPROVALS

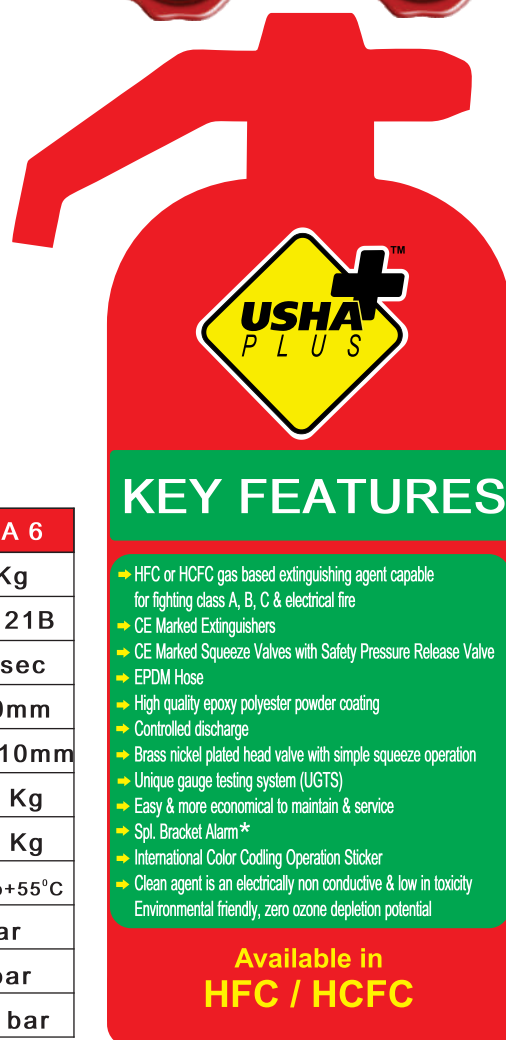

MODEL	UFCA 1	UFCA 2	UFCA 4	UFCA 6
Capacity	1Kg	2Kg	4Kg	6Kg
Fire Rating	8B	8B	1A : 13B	1A : 21B
Average Discharge Time	11 sec	12 sec	14 sec	22sec
Height (Approx.)	325mm	380mm	490mm	530mm
Diameter (Approx.)	86 ± 10mm	106 ± 10mm	140 ± 10mm	150 ± 10mm
Filled weight	2 Kg	3.6 Kg	6.7 Kg	8.9 Kg
Empty weight	1 Kg	1.6 Kg	2.7 Kg	2.9 Kg
Operating Temperature	+5°C to +55°C	-20°C to +55°C	-20°C to +55°C	+5°C to +55°C
Working Pressure at 20 C	9 bar	9 bar	9 bar	9 bar
Maximum Service Pressure	15 bar	15 bar	15 bar	15 bar
Test Pressure	35 bar	35 bar	35 bar	35 bar

- ➔ HFC or HCFC gas based extinguishing agent capable for fighting class A, B, C & electrical fire
- ➔ CE Marked Extinguishers
- ➔ CE Marked Squeeze Valves with Safety Pressure Release Valve
- ➔ EPDM Hose
- ➔ High quality epoxy polyester powder coating
- ➔ Controlled discharge
- ➔ Brass nickel plated head valve with simple squeeze operation
- ➔ Unique gauge testing system (UGTS)
- ➔ Easy & more economical to maintain & service
- ➔ Spl. Bracket Alarm*
- ➔ International Color Coding Operation Sticker
- ➔ Clean agent is an electrically non conductive & low in toxicity
- ➔ Environmental friendly, zero ozone depletion potential

Available in
HFC / HCFC

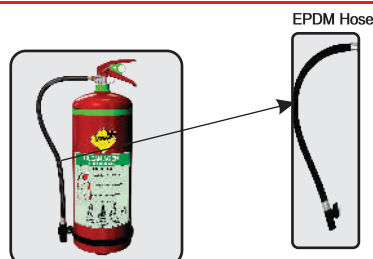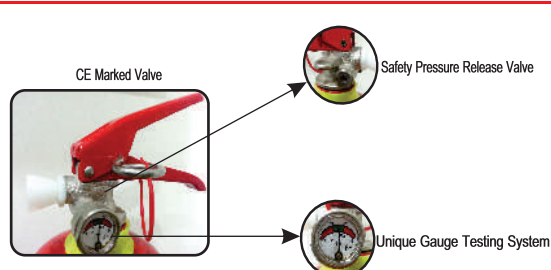

(Optional Accessories)

